

INDUSTRIAL

G-Drive

N45

N45

95 kWm @ 1800 rpm

Tier 3


SPECIFICATIONS

Certification	Tier 3	
No. of cylinders	4L	
Injection System	M	
Air Intake	TAA	
Displacement	liters	4.5
Exhaust System	I-EGR	
Stand-by Power @ 1500 rpm	kWm	-
Prime Power @ 1500 rpm	kWm	-
Stand-by Power @ 1800 rpm	kWm	95
Prime Power @ 1800 rpm	kWm	87
Code	NEF45TM2X	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1367 x 753 x 1085
Dry Weight	Kg	500

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

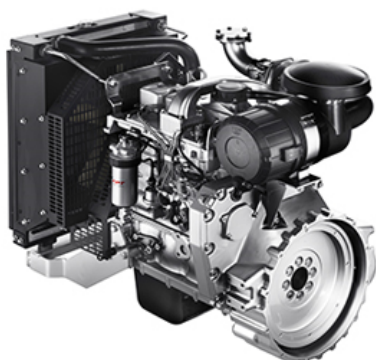

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

LEGEND

Arrangement

L (in line)
V (90° "V" configuration)

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Injection System

M (Mechanical)
ECR (Electronic Common Rail)
EUI (Electronic Unit Injector)
MPI (Multi Point Injection)

G-DRIVE

MARINE & INDUSTRIAL
POWER

MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019

MORE INFORMATION ABOUT CONFIGURATIONS AND ACCESSORIES AVAILABILITY, THROUGH THE WORLDWIDE FPT INDUSTRIAL DISTRIBUTORS NETWORK
NOT ALL MODELS, STANDARD EQUIPMENT AND ACCESSORIES ARE AVAILABLE IN ALL COUNTRIES. SPECIFICATIONS AND OPTIONS MAY CHANGE WITHOUT NOTICE