

POWER GENERATION

G-Drive

N67

N67

141 kWm @ 1800 rpm

Tier 3


SPECIFICATIONS

Certification		Tier 3
No. of cylinders		6L
Injection System		M
Air Intake		TAA
Displacement	liters	6.7
Exhaust System		I-EGR
Stand-by Power @ 1500 rpm	kWm	-
Prime Power @ 1500 rpm	kWm	-
Stand-by Power @ 1800 rpm	kWm	141
Prime Power @ 1800 rpm	kWm	128
Code		NEF67TM1X

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1697 x 789 x 1318
Dry Weight	Kg	640

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

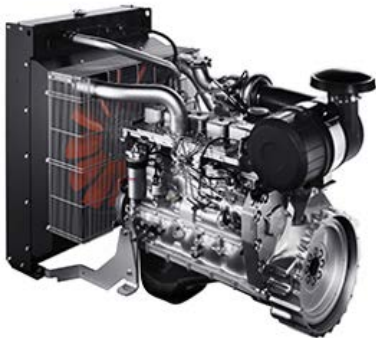

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

LEGEND

Arrangement

L (in line)
V (90° "V" configuration)

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Injection System

M (Mechanical)
ECR (Electronic Common Rail)
EUI (Electronic Unit Injector)
MPI (Multi Point Injection)

LEESGROUP
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE