


### SPECIFICATIONS

No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL 1600 bar
Turbocharger	WG
Displacement	liters 6.7
Bore x Stroke	millimeters 104 x 132
Rated power	kW (HP) @ rpm 212 (288) @ 2200
Max Torque	Nm @ rpm 1160 @ 1500
ATS	HI-eSCR2
Certification	Stage V / Tier 4 Final


### POWER & TORQUE

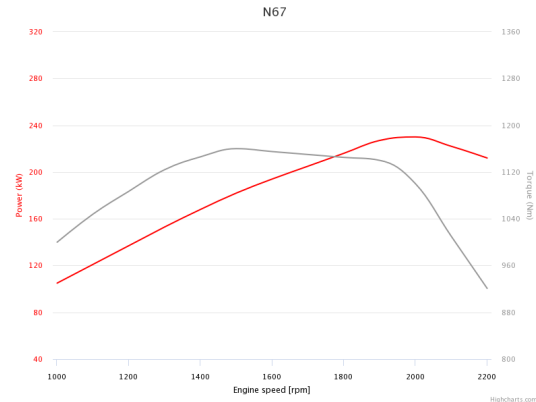

### WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1696 x 1035 x 1580
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

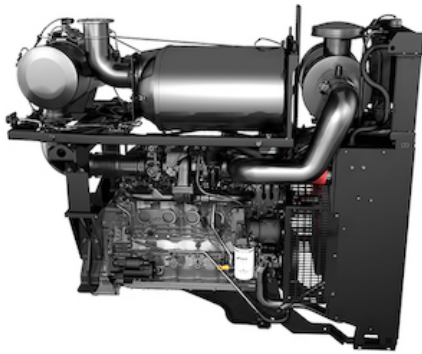

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

### LEGEND

#### Air Handling

TCA (Turbocharged with aftercooler)  
TC (Turbocharged)  
NA (Naturally Aspirated)

#### Turbocharger

WG (Wastegate)  
VGT (Variable Geometry Turbocharger)  
TST (Twin Stage Turbocharge)

#### Exhaust System

EGR (Exhaust Gas Recirculation)  
SCR (Selective Catalytic Reduction)  
DOC (Diesel Oxidation Catalyst)  
DPF (Diesel Particulate Filter)

**LEESGROUP**  
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)  
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE