

INDUSTRIAL

Power Units

N67

N67
212 kW (288 HP) @ 2200 rpm
Stage V / Tier 4 Final


SPECIFICATIONS

No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL 1600 bar
Turbocharger	WG
Displacement	liters 6.7
Bore x Stroke	millimeters 104 x 132
Rated power	kW (HP) @ rpm 212 (288) @ 2200
Max Torque	Nm @ rpm 1160 @ 1500
ATS	HI-eSCR2
Certification	Stage V / Tier 4 Final

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1696 x 1035 x 1580
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

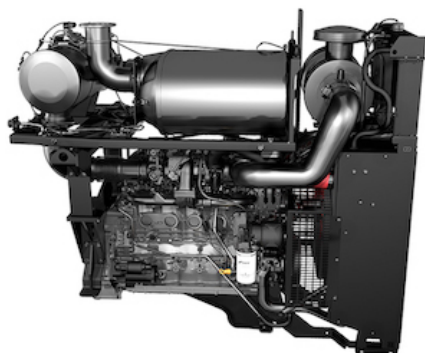

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

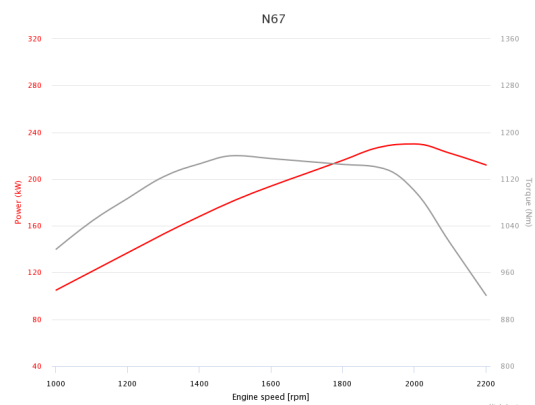

POWER UNITS

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharge)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

MARINE & INDUSTRIAL
POWER

MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

