

# INDUSTRIAL

## Pumping

# CURSOR 16

# CURSOR 16

480 kW (653 HP) @ 2100 rpm

Stage IV / Tier 4 Final

### SPECIFICATIONS



No. of cylinders / valves	6L / 4
Turbocharger	WG
Injection System	COMMON RAIL 2200 bar
Displacement	liters 15.9
Bore x Stroke	millimeters 141 x 170
Max power	kW (HP) @ rpm 480 (653) @ 2100
Max Torque	Nm @ rpm 2750 @ 2100
ATS	HI-eSCR
Certification	Stage IV / Tier 4 Final

### WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1477 x 927 x 1366
Dry Weight	Kg	1320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

### POWER & TORQUE

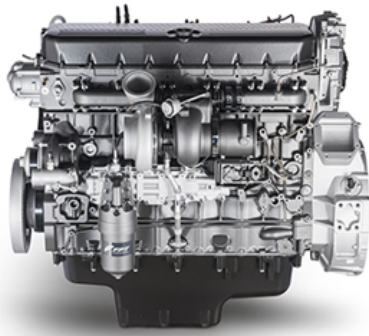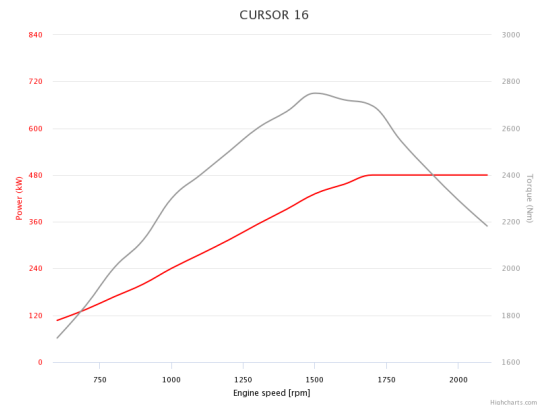

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

#### LEGEND

#### Air Handling

- TC (Turbocharged)
- NA (Naturally Aspirated)
- TCA (Turbocharged with aftercooler)

#### Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

#### Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

# LEESGROUP

MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+ 64 9 299 6019 | leesgroup.com

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM  
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE