

INDUSTRIAL

G-Drive

CURSOR 16

CURSOR 16

557 kWm @ 1500 rpm

Unregulated


SPECIFICATIONS

Certification		Unregulated
No. of cylinders		6L
Injection System		ECR
Air Intake		TAA
Displacement	liters	15.9
Exhaust System		-
Stand-by Power @ 1500 rpm	kWm	557
Prime Power @ 1500 rpm	kWm	505
Stand-by Power @ 1800 rpm	kWm	578
Prime Power @ 1800 rpm	kWm	523
Code		CURSOR16TE1 ...

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	2353 x 1114 x 1605
Dry Weight	Kg	1450

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

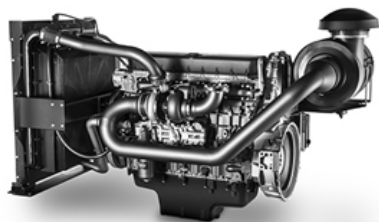

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

LEGEND

Arrangement

L (in line)
V (90° "V" configuration)

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Injection System

M (Mechanical)
ECR (Electronic Common Rail)
EUI (Electronic Unit Injector)
MPI (Multi Point Injection)

LEESGROUP
MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+ 64 9 299 6019 | leesgroup.com

MORE INFORMATION ABOUT CONFIGURATIONS AND ACCESSORIES AVAILABILITY, THROUGH THE WORLDWIDE FPT INDUSTRIAL DISTRIBUTORS NETWORK
NOT ALL MODELS, STANDARD EQUIPMENT AND ACCESSORIES ARE AVAILABLE IN ALL COUNTRIES. SPECIFICATIONS AND OPTIONS MAY CHANGE WITHOUT NOTICE