

### SPECIFICATIONS

No. of cylinders / valves	4L / 4
Turbocharger	WG (TCA)
Injection System	MECHANICAL
Displacement	liters 4.5
Bore x Stroke	millimeters 104 x 132
Rated power	kW (HP) @ rpm 66 (90) @ 2200
Max Torque	Nm @ rpm 400 @ -
ATS	i-EGR
Certification	Stage III A / Tier 3

### WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	810 x 676 x 901
Dry Weight	Kg	410

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

### POWER & TORQUE

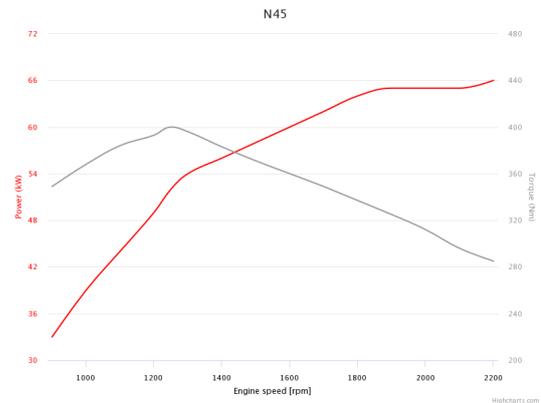

### LEGEND

#### Air Handling

- TC (Turbocharged)
- NA (Naturally Aspirated)
- TCA (Turbocharged with aftercooler)

#### Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

#### Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

MARINE & INDUSTRIAL  
**POWER**

MARINE & INDUSTRIAL POWER | GENERATORS

Contact us

+64 9 299 6019

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)  
SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

